(51) International Patent Classification 6 : **H04Q 7/38**	**A1**	(11) International Publication Number: **WO 95/08246**
		(43) International Publication Date: 23 March 1995 (23.03.95)

(54) Title: METHOD FOR SUPERVISING BASE STATION RADIO CHANNELS
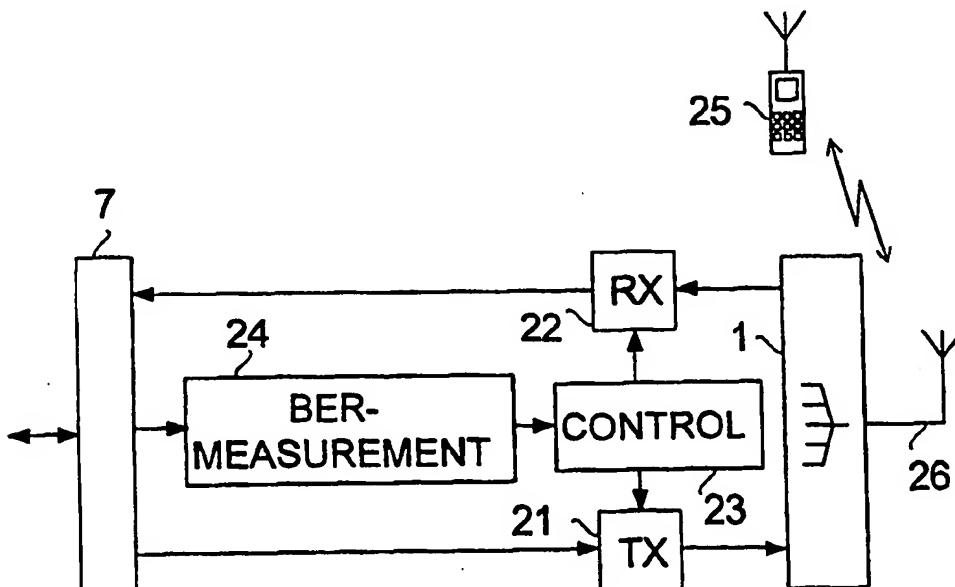
(57) Abstract

This invention relates to a method for supervising base station radio channels to detect channels with interference and/or poor quality. This is achieved according to the invention by measuring and analysing connection separately for each radio channel. For instance radio channels with poor quality and/or interference in the frequency hopping sequence can be detected.

1

Method for supervising base station radio channels

This invention relates to a method for
supervising base station radio channels by means of
interference measurement. The invention relates further
to a method for supervising base station radio channels
by measuring the quality of a received signal.

One of the most critical factors in radio
systems, for example in cellular mobile telephone
systems, is the quality of the radio connection between
the base station and a mobile station. The quality of
this radio connection is influenced substantially by the
condition of the radio parts, i.e. the antennas and the
transceivers, of the base station. Therefore, the
condition of the radio parts of the base station is
supervised by means of various measurements and tests.
Another factor influencing the quality of the radio
connection is radio-frequency interference occurring in
radio channels, resulting from, for example, other radio
devices or base stations.

Therefore, the specifications of the Pan-
European GSM mobile radio system for instance require
a base station to supervise the quality of received
signals during normal traffic operation, for example by
calculating the bit error rate (BER) on the basis of a
signal obtained from the output of the receiver of the
base station. Moreover, the base station is required to
measure continuously the interference level of a radio
channel in all non-active dedicated channels, i.e. both
in signalling and traffic channels. At the moment, the
interference level of the radio path is measured at the
base station separately for each connection, whereupon
the base station transmits information of the
interference level of each free signalling or traffic

2

connection to other parts of the system, for example to the base station controller (BSC) at predetermined intervals. The problem with the present measuring technique is that even though disturbances in the radio path usually vary greatly as a function of frequency, a measuring method of the present type cannot give any information about this "interference distribution" between different radio channels, especially if the base station uses frequency hopping. Frequency hopping refers to operation where the transmitting frequency and correspondingly the receiving frequency at the receiving end are continuously changed during a connection by using a suitable number of frequencies and a predetermined frequency hopping sequence. The use of frequency hopping yields two different advantages, namely frequency diversity and interference diversity. Frequency diversity improves the quality of a radio connection mainly when a transmitter and a receiver move slowly in relation to each other. If the frequency of a radio connection in a time division multiple access (TDMA) system is changed enough from one channel time slot to another, the fading situations imposed on different time slots do not correlate. The interference diversity effect is based on the fact that the frequency hopping sequences of base stations using the same or adjacent frequencies are different or at least are phased in relation to each other, and therefore the frequencies interfering with each other also change on transition from one time slot to another, and the effect of strong sources of interference is distributed among several connections, whereupon the effect of the interference on a single connection decreases. However, this only accentuates further the aforementioned problem that the present techniques of interference measurement

3

do not provide information about the distribution of interference between different radio channels.

One aim of the present invention is to eliminate the above problem. This aim is achieved by means of a method according to the invention which is characterized in that the interference level of a control or traffic channel hopping from one radio channel to another during a connection is measured separately for each used radio channel, and the measured interference levels are stored separately for each radio channel, that the interference levels of each radio channel measured during a predetermined period of time are analyzed, and that a disturbed radio channel is detected on the basis of the analysis.

In the invention a base station measures the interference level of each radio channel and determines the distribution of interference between different radio channels by analysing the interference levels of each radio channel measured during a predetermined period of time. On the basis of the analysis, it is possible to detect strongly disturbed radio channels. In a preferred embodiment of the invention, the analysis comprises calculating, for each radio channel, the average of the interference level values measured during a predetermined period of time. The base station reports the results of the measuring for instance to the operation and maintenance centre of the radio system. On the basis of the measurement results of each radio channel, it is possible to detect a disturbed radio channel and the source/s of interference and to utilize this information for example in the reconfiguration of the network to eliminate the interference.

Another aim of the present invention is to improve the quality of a radio connection. This aim is achieved by means of a method according to the invention

4

which is characterized in that the received signal quality of a control or traffic channel hopping from one radio channel to another during a connection is measured separately for each used radio channel, and the measured values are stored separately for each radio channel, that the signals measured during a predetermined period of time are analyzed separately for each radio channel, and that a radio channel of poor quality is detected on the basis of the analysis.

By means of this embodiment according to the invention, radio channels weakening the quality of a connection can be detected during an ongoing call, after which the base station can take the required steps to improve the quality of the connection.

In a preferred embodiment according to the invention, a radio channel detected to be of poor quality is discarded, preferably by replacing it in the frequency hopping sequence with another radio channel. Moreover, since the quality of the radio channels is supervised separately for each connection, the quality of a single connection can be improved by means of the method according to the invention by changing the frequency hopping sequence used by the connection in question so that the radio channel of poor quality is no longer used for the particular connection.

The preferred embodiments of the method according to the invention appear from the appended dependent claims 2 to 4, and 5 to 8.

The invention will be described in the following in greater detail by means of illustrative embodiments and with reference to the accompanying figures, in which

Figure 1 is a block diagram of a base station according to the invention, and

Figure 2 is a block diagram of a transceiver

unit according to the invention.

The method and the transceiver unit according
to the present invention are applicable at least in all
time division multiple access (TDMA) systems. These
include the Pan-European mobile communication system GSM
and its direct modifications, such as the Digital
Communication System DCS1800. In the following, the GSM
system will be used as an example. The ETSI/GSM
Recommendations and *The GSM System for Mobile
Communications* (by M.Mouly and M-B. Pautet, Palaiseau,
France, 1992, ISBN:2-9507190-0-7) are referred to for
a more detailed description of the GSM system.

The GSM system follows the frequency division
multiple access (FDMA) principle, according to which
there are a number of radio channels (carrier
frequencies) in use in the system. In the radio channels
on the other hand, time division multiplexing is applied
on the TDMA principle so that each radio channel
comprises several, typically 8, TDMA time slots. The
time slots are mainly used to transmit control channels
(CCH) and traffic channels (TCH). In the traffic
channels, speech and data are transmitted. Signalling
between the base station and mobile subscriber stations
takes place in the control channels.

Figure 1 shows a block diagram of a base
station according to the invention. The base station
comprises preferably at least two transceiver units 6a,
6b and 6c. In the GSM system each transceiver is of
full-duplex type, and the duplex spacing between the
transmitting and receiving frequencies of the
transceiver is 45 MHz. The frequency range used by the
system varies preferably between 800 and 1,000 MHz. The
transceivers 6a to 6c have fixed transmitting and
receiving frequencies which differ from each other. The
outputs 10a to 10c of the transceivers 6a to 6c are

6

connected to the radio-frequency combining and branching unit 1, which connects the transmitters of the transceivers 6a to 6c to a common transmitting antenna 2 (by means of combiner filters) and the receivers to a common receiving antenna 3 (by means of a branching equipment). There can be alternatively two receiving antennas, if diversity reception is used. The radio-frequency combining unit 1 comprises a band-pass-type transmitting filter for the transmitter of each unit 6a. The filter has been manually or automatically tuned to the transmitting frequency of the transmitter. Correspondingly, the combining unit 1 comprises a receiving filter which limits the signal coming from the antenna to the receiving band, and a division amplifier that amplifies the signal and divides it to all receivers.

A base station shown in Figure 1 comprises further several carrier-frequency frame units 7a, 7b and 7c, which form the carrier-frequency modulation signals for the transceiver units 6a to 6c and which handle the signals that the transceivers have received and converted to the carrier frequency. In the frame units 7 user data and control data to be transmitted is placed in TDMA frames, channel-coded and interleaved, after which it is modulated in the transmitting unit into a TDMA burst onto the desired transmitting carrier. Correspondingly, the frame unit 7 performs demodulation, de-interleaving, channel decoding and deframing on the received signals.

Between the transceiver units 6a to 6c and the frame units 7a to 7c there is a cross-point-type switching matrix 5, which connects the outbound carrier-frequency signals generated in the frame units 7 in turn to each of the transceivers 6a to 6c according to a predetermined frequency hopping sequence, so that the

signal of a specific frame unit 7 hops from one transmitting frequency to another. Correspondingly, the switching matrix 5 connects signals which the transceivers have received and converted to the carrier frequency to the frame units 7a to 7c according to a predetermined frequency hopping sequence. Alternatively, the frequency hopping may be realized by connecting each frame unit directly to a dedicated transceiver, the frequency of which is changed according to the frequency hopping sequence (cf. Figure 2).

The operation of the base station is controlled by the operation and maintenance unit 20 (OMU) of the base station. The OMU 20 is also used as a measuring unit, which receives a radio-frequency signal from the branching equipment and measures the level of the received signal. Alternatively, the receivers Rx may comprise measuring equipment, which measures the received signal level and forwards the result of the measuring to the OMU 20. The base station may also have an associated special testing means STM which simulates the subscriber equipment and which is denoted generally by reference numeral 11. The MS/STM 11 can be under the direct control of the base station (broken line 13) so that the OMU 20 controls the testing operations. The MS/STM 11 can for example transmit a known test signal via the radio path, the level of the signal being measured at the base station.

In the case shown in Figure 1, the base station measures the interference level in free, non-active traffic and control channels. A free and non-active channel means that the base station does not transmit or receive any payload signal on that particular channel. Thus, all radio-frequency energy measured on that channel is interference energy. According to the invention, a measuring unit situated in the OMU 20 or

8

in the channel unit 6 measures, separately for each
radio channel, the interference levels of radio-
frequency interference signals or bursts received from
the antenna on the channel. The OMU 20 calculates radio-
channel-specific averages from interference level values
measured during a predetermined period of time, after
which the calculated averages are transmitted from the
base station for example to the operation and
maintenance centre (OMC) of the radio system. If, for
example, the base station uses radio channels 0, 12, 22
and 38, it transmits at predetermined intervals a report
of the measurement, which reads:

interference level on channel 0 = X

interference level on channel 12 = Y

interference level on channel 22 = Z

interference level on channel 38 = N.

On the basis of the average interference levels measured
on each radio channel, it is possible to detect a
disturbed channel the average interference level of
which is clearly higher than that of other radio
channels. After this the channel with the high level of
interference can be discarded, if necessary, by changing
the frequency hopping sequence used by the switching
matrix, for example by replacing in the frequency
hopping sequence a channel unit tuned to the disturbed
channel with another, previously unused, channel unit
which is tuned to another frequency channel.

Figure 2 shows a block diagram of a transceiver
unit according to the invention. The unit in question
is a transceiver unit placed in a base station of the
GSM system and communicating with a mobile radio unit
25 by means of a combined transmitting and receiving
antenna 26. The combining and branching unit 1 connects
the transmitter 21 and the receiver 22 to the antenna
26. Other transceiver units (not shown in Figure 2) in

9

the base station are also connected to the antenna 26
by means of the combining unit 1.

The transceiver unit shown in Figure 2 deviates
from the transceiver units shown in Figure 1 in that the
frequency hopping is realized in a different way. The
transmitter 21 and the receiver 22 shown in Figure 2 are
not permanently tuned to a particular frequency channel
as in the case of Figure 1, where the frequency hopping
is realized by means of the switching matrix 5. In the
case of Figure 2, the transmitter 21 and the receiver
22 are connected directly to the frame unit 7, and the
frequency hopping is realized by means of a control unit
23, so that before each outbound burst the control unit
changes the radio channel of the transmitter 21 and the
receiver 22 according to a predetermined frequency
hopping sequence.

A measuring unit 24 measures and calculates the
bit error rate of the received radio-frequency signals
separately for each frequency channel and each
connection, i.e. separately for each frequency channel
used by a particular connection on the basis of signals
obtained from the input of the receiver 22, after the
frame unit 7 has disassembled the frame units. Thus, the
measuring unit 24 calculates the frequency-channel-
specific averages of the bit error rates calculated for
the connection during a predetermined period of time,
after which the calculated averages are fed into the
control unit 23 separately for each frequency channel
and each connection of the transceiver unit.

When the control unit 23 has detected, in the
aforementioned manner, a connection-specific disturbed
frequency channel, it notifies the radio unit 25 of the
elimination of one or more channels and/or of their
replacement with another frequency channel starting from
a given frame. If the disturbed channel is eliminated,

10

the connection between the transceiver unit and the radio unit 25 continues on the remaining frequency channels. An indication of the change in the frequency hopping sequence is transmitted to the radio unit 25 by means of, for instance, the fast associated control channel (FACCH) of the GSM system.

The control unit places the discarded frequency channels under supervision. This takes place according to the invention in such a way that the radio unit 25 transmits test bursts on the discarded frequency channels, on a frequency channel placed under supervision, to the transceiver units during the empty frames described in the GSM specifications. On the basis of the measuring results obtained from the test bursts, a discarded frequency channel can be brought back into use by adding it to the frequency hopping sequence of the transceiver in the same way as it was removed from it.

It must be understood that the above description and the accompanying figures are only meant to illustrate the present invention. Different variations and modifications of the invention will be evident to those skilled in the art without departing from the scope and the spirit of the invention disclosed in the appended claims.

11

Claims

1. A method for supervising base station radio channels by means of interference measurement, c h a r a c t e r i z e d in that

the interference level of a control or traffic channel hopping from one radio channel to another during a connection is measured separately for each used radio channel, and the measured interference levels are stored separately for each radio channel,

the interference levels of each radio channel measured during a predetermined period of time are analyzed, and

a disturbed radio channel is detected on the basis of the analysis.

2. A method according to claim 1, c h a r a c t e r i z e d in that

the analysis comprises calculating, for each radio channel, an average interference level on the basis of the interference levels measured during said predetermined period of time, and that

a disturbed radio channel is detected on the basis of the calculated average interference level.

3. A method according to claim 1 or 2, c h a r a c t e r i z e d in that the detected disturbed radio channel is discarded, preferably by replacing it in the frequency hopping sequence with an interference-free radio channel.

4. A method according to claim 3, c h a r a c t e r i z e d in that the discarded radio channel is brought back into use when its average interference level falls below a predetermined limit value.

12

5. A method for supervising base station radio channels by measuring the quality of a received signal, c h a r a c t e r i z e d   in that

the received signal quality of a control or traffic channel hopping from one radio channel to another during a connection is measured separately for each used radio channel, and the measured values are stored separately for each radio channel,

the signals measured during a predetermined period of time are analyzed separately for each radio channel, and

a radio channel of poor quality is detected on the basis of the analysis.

6. A method according to claim 5, c h a r a c t e r i z e d   in that

the quality of the signal is measured by calculating the bit error rate separately for each used radio channel, the analysis comprising calculating the average bit error rate of each radio channel during said predetermined period of time, and that

a radio channel of poor quality is detected on the basis of the calculated average bit error rate.

7. A method according to claim 5 or 6, c h a r a c t e r i z e d   in that the detected radio channel of poor quality is discarded, preferably by replacing it in the frequency hopping sequence with another radio channel.

8. A method according to any one of the claims 5 to 7,   c h a r a c t e r i z e d   in that the quality of radio channels is measured and analyzed separately for each connection.
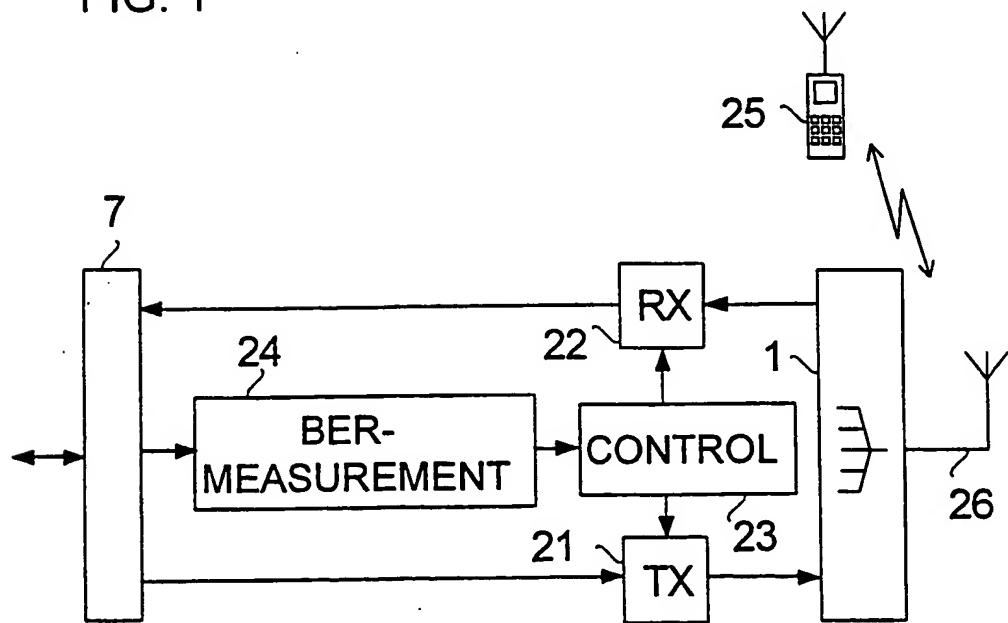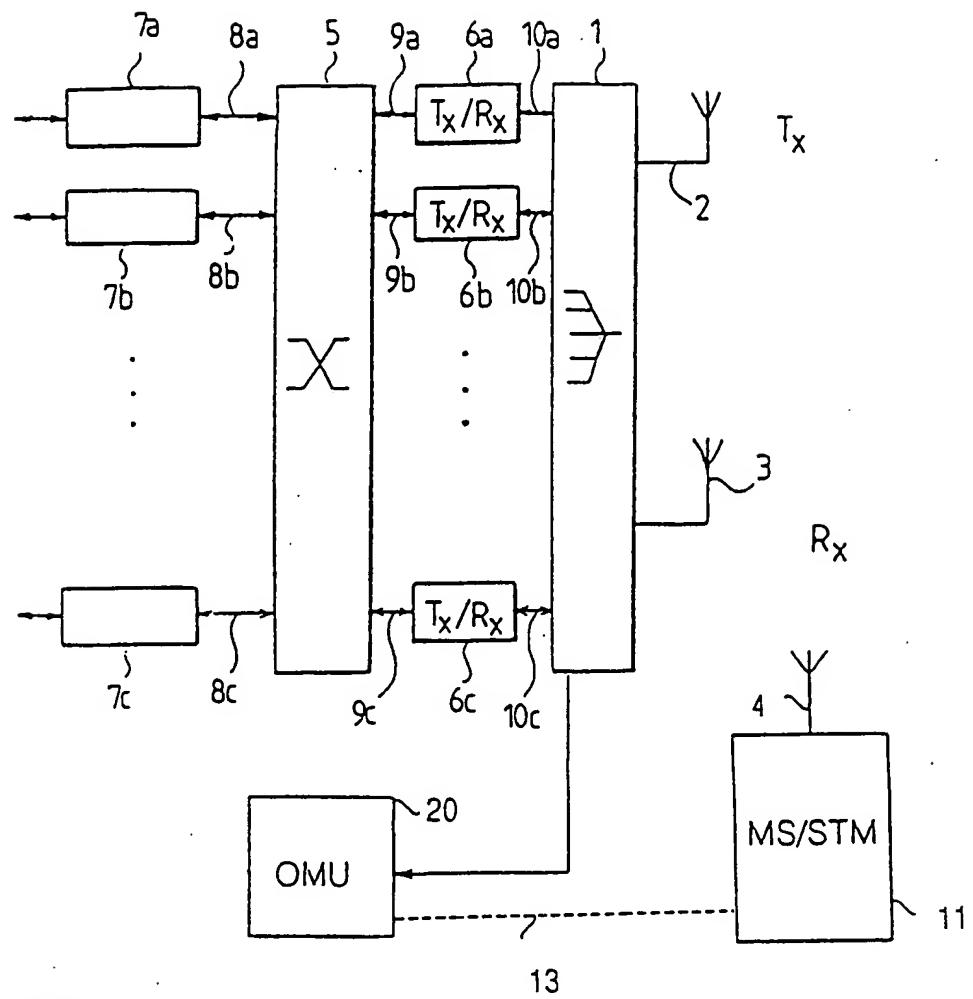
FIG. 1

FIG. 2

INTERNATIONAL SEARCH REPORT

|	
A. CLASSIFICATION OF SUBJECT MATTER	

IPC6: H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Patent Abstracts of Japan, Vol 12,No 397, E-672, abstract of JP, A, 63-138824 (MITSUBISHI ELECTRIC CORP), 10 June 1988 (10.06.88)	1,5
	--	
A	WO, A1, 9316567 (MOTOROLA, INC.), 19 August 1993 (19.08.93), claim 5, abstract	1,5
	--	
A	GB, A, 2254971 (TELEFONAKTIEBOLAGET LM ERICSSON), 21 October 1992 (21.10.92), page 8, line 32 - page 9, line 10; page 10, line 26 - line 36	1,5
	--	

☐ Further documents are listed in the continuation of Box C.   ☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	
"E" erlier document but published on or after the international filing date	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
16 January 1995	1 7 -01- 1995
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer Bengt Jonsson Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
WO-A1- 9316567	19/08/93	AU-A-	3661593	03/09/93
		CN-A-	1075389	18/08/93
		EP-A,A-	0626121	30/11/94
		FI-A,D-	943312	12/07/94
		US-A-	5203012	13/04/93
GB-A- 2254971	21/10/92	JP-A-	4326629	16/11/92
		SE-A-	9200574	08/09/92